

Venables Associates

HEALTH AND SAFETY POLICY

April 2012

Union House
High Street
Billericay
Essex CM12 9AH

Tel: 01277 634734
Fax: 01277 632450

CONTENTS

1	HEALTH AND SAFETY POLICY STATEMENT	3
2	RESPONSIBILITIES	5
2.1	Work Activities	5
2.2	Employer's Responsibilities	5
2.3	Employee's Responsibilities	5
2.4	Organisation chart	7
3	ARRANGEMENTS	9
3.1	Managing Health and Safety Risks	9
3.2	Consultation with Employees	9
3.3	Staff Inductions	10
3.4	Safe Premises and Equipment	10
3.5	Safe Handling and Use of Substances (COSHH)	11
3.6	Information, Instruction or Supervision	12
3.7	Competency for Tasks and Training	13
3.8	Personal Protective Equipment (PPE)	13
3.9	Accidents, First Aid, Work-Related Illnesses and Reporting	14
3.10	Monitoring	16
3.11	Emergency procedures - fire and evacuation	16
3.12	Welfare Facilities	18
3.13	Site security	19
4	KEY AREAS OF RISK	21
	Slips, trips and falls	22
	Falls from height	22
	Fixed scaffolding	23
	Mobile scaffold towers	23
	Noise	26
	Manual handling	27
	Work in control panels	28
	Electrical isolation	29
	Portable appliances	33
	Legionella	34
	Hazardous substances (COSHH)	35
	Dust	38

Cuts and minor injuries	38
Burns	38
Asbestos	39
Fire	41
Driving on Public Roads	45
Vulnerable employees	46
Confined spaces	48
Lone working	49
Alcohol and drugs	49
Smoking	50
Horseplay	51
Display screen equipment	51
Stress	53
5 HEALTH AND SAFETY INFORMATION	55
APPENDIX 1: RISK ASSESSMENTS AND METHOD STATEMENTS	57
APPENDIX 2: SELECTION OF SUBCONTRACTORS	61
APPENDIX 3: CO-ORDINATION AND COOPERATION	63
The client	63
Principal contractor	63
Designers	64
Use of sub-contractors	65
Other measures	65
APPENDIX 4: SAFETY INSPECTIONS	67
Inspections by others	67
Health and Safety Inspectors	67
APPENDIX 5: LOSS INCIDENT INVESTIGATION	69

1 HEALTH AND SAFETY POLICY STATEMENT

The Health and Safety at Work Act etc 1974 requires all companies with 5 or more employees to have a written health and safety policy. The Venables Associates statement of health and safety policy is:

- To provide adequate control of the health and safety risks arising from our work activities;
- To consult with our employees on matters affecting their health and safety and that of contractors, clients, visitors and anyone who may be affected by our work, including members of the public;
- To provide and maintain a safe place of work;
- To ensure safe handling and use of tools, machinery, equipment and materials (including hazardous substances);
- To ensure that safe working practices are followed;
- To provide safety equipment, including personal protective equipment (PPE) and ensure it is used;
- To provide safety information, instruction, training and supervision;
- To ensure all employees are competent to do their tasks;
- To prevent accidents and cases of work-related ill health;
- To develop an "Open door" culture to encourage communication and to share information by regular discussion;
- To review and revise this policy as required on an annual basis as a minimum requirement and in response to changes in legislation, working practices, the types of work undertaken or key Company personnel;
- To make available to the Company's staff all necessary equipment and resources to achieve these objectives, including adequate financial resources and access to external advice, where appropriate.

Ian Venables Director	
Initial Issue Date	October 2010
Next review	October 2012

This page has been left blank deliberately.

2 RESPONSIBILITIES

2.1 Work Activities

The primary work activities of Venables Associates are mechanical and electrical design. The company has office premises where design takes place. Office environments are generally deemed to be low risk. Members of staff have to attend site periodically for meetings, and activities such as commissioning and testing. Whilst on site they will be required to carry out work tasks including surveying, testing and commissioning in unoccupied commercial premises, plant rooms and other environments where a variety of physical, biological, environmental and psycho-social hazards may be present.

The construction sites visited may be at any stage and can be hazardous environments presenting a concomitant variety of hazards such as noise, slips and trips and work at height.

2.2 Employer's Responsibilities

- The Managing Director has overall and final responsibility for health and safety issues within the Company.
- The Safety Officer has day-to-day responsibility for ensuring this policy is put into practice during project works on site.

2.3 Employee's Responsibilities

The term "Employees" refers to all staff, whether they are:

- Full- or part-time.
- Subcontractors.
- Temporary or permanent (including agency staff and workers from outside the UK).
- Self-employed.
- Young people on work-experience.
- Apprentices.
- Employed at the same address or at more than one location.


Employees of Venables Associates are required to:

- Co-operate with supervisors and the management of the Company on health and safety matters.
- Not interfere with anything provided to safeguard health and safety of staff, clients or other contractors.
- Take reasonable care of their own health and safety.
- Take reasonable care of the health and safety of others, including site visitors, passers-by and anyone who may be affected by our work.
- Work in a safe manner in accordance with safe working practices and Company risk assessments and method statements.
- Use personal protective equipment and any other safety equipment as instructed by the Company.
- Address and resolve health and safety issues as they arise in the office and on site wherever possible.
- Report all health and safety concerns and issues that cannot be addressed and resolved to the Safety Officer.
- Not to use any tool, machinery or equipment that is damaged or otherwise unsafe, or that they have not been trained or authorised to use.
- All employees who attend site must be familiar with and abide by the Venables Associates Ltd Site Safety Procedures Document Reference VA/HAS.002

Failure to follow the Company's documented health and safety procedures and processes may result in disciplinary action.

2.4 Organisation chart

First

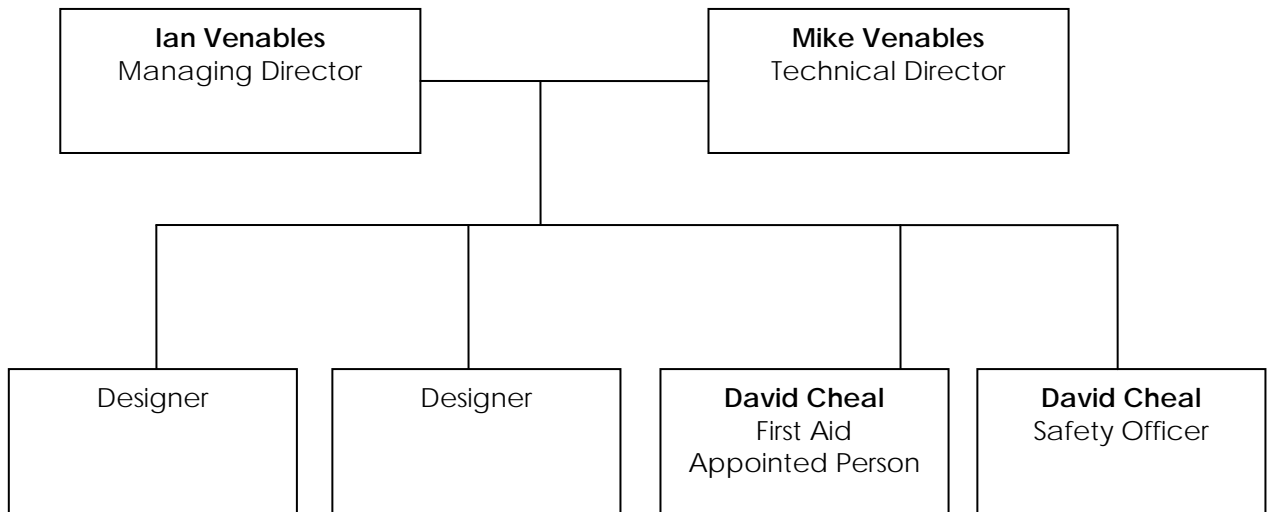

When necessary, Mike Venables will deputise for David Cheal as Safety Officer.

Note:

The guiding principles of health and safety in the UK are set out in a number of laws and codes of practice. Some of the key ones are listed below. The Directors of Venables Associates understand their duties and will act in accordance with them at all times, for the benefit of all parties. The Company expects that everyone working on its behalf will do the same. Further information is supplied in the section entitled "Health and Safety Information". A copy of Managing Health and Safety in Construction, the Approved Code of Practice to The Construction (Design and Management) Regulations 2007, is kept in the office for reference.



Applicable regulations include:

Health and Safety at Work Act 1974

The Management of Health and Safety Regulations 1999

The Construction (Design and Management) Regulations 2007



Further information can be found in the following leaflets and HSE publication:

Health and Safety Law: What you should know

Health and safety regulation... a short guide

Leading health and safety at work

Managing Health and Safety in Construction

3 ARRANGEMENTS

This section sets out how the various responsibilities outlined in the previous section are to be put into action on a day to day basis.

3.1 Managing Health and Safety Risks

The Safety Officer will:

- Undertake Risk Assessments.
- Approve action required to remove or control risks.
- Be responsible for ensuring the action required is implemented.
- Check that the implemented actions have removed/reduced the risks.

Generic risk assessments and method statements will be reviewed every 6 months, or when the work activity changes, whichever is soonest.

All work activities will be assessed to determine whether they are covered by the generic documents.

Specific risk assessments and method statements will be produced where the work activity is outside the scope of the generic documents.

3.2 Consultation with Employees

Consultation with employees is provided by the Safety Officer for all staff. Venables Associates recognises that the safety of everyone who works for the Company is of paramount importance and has an "Open door" policy on matters relating to health and safety. Any employee who has an issue with a matter relating to health and safety should talk to the Safety Officer in the knowledge that his or her concerns will be taken seriously and that remedial action will be taken if necessary.

3.3 Staff Inductions

The Safety Officer is responsible for providing new employees with a health and safety induction, so that he/she knows what is expected by Venables Associates in terms of processes, procedures and behaviour.

This is a useful opportunity to ask questions if you have any special requirements or health and safety concerns.

3.4 Safe Premises and Equipment

Testing and maintenance of fixed wiring at our office premises is the responsibility of the Landlord and will be carried out in accordance with the Landlord's testing procedures. Electrical installations must be tested upon completion and thereafter 3-5 yearly, depending upon the type of installation and the wear and tear that can be expected.

The Safety Officer will be responsible for:

- Identifying all tools, machinery and equipment needing maintenance, repair or replacement.
- Identifying and providing any safety equipment required, including personal protective equipment for that staff need for site use.
- Ensuring effective maintenance procedures for tools, machinery and equipment are drawn up.
- Ensuring that all identified maintenance, repair or replacement of tools, machinery and equipment is implemented.
- Checking that all new tools, machinery and equipment meet health and safety standards before purchase
- Controlling waste.

All tools, machinery and equipment should be visually inspected before use and any problems found must be reported the Safety Officer immediately or as soon as is practically possible. Machinery will be checked at intervals as specified by the manufacturer under maintenance contracts or by employees who have been trained to do so.

Any problems found with tools, machinery and equipment must be reported to the Safety Officer immediately (or as soon as is practically possible).

High standards of housekeeping are essential to keep the working environment healthy and hazard-free:

- Each employee will be responsible for keeping his or her work area clean and tidy.
- The premises will be cleaned by a contracted party twice weekly.
- All employees will collect waste in bins provided which shall be emptied twice weekly by the cleaning contractor.
- Large items of waste will be removed from the office to the storage area prior to collection by the waste contractor.
- Employees will not obstruct gangways, escape routes or fire exits at any time.
- Fire extinguishers must not be used as door stops but must be kept on an appropriate bracket or other fixing.

3.5 Safe Handling and Use of Substances (COSHH)

The Safety Officer will be responsible for:

- Identifying all substances used that need a COSHH assessment.
- Undertaking COSHH assessments for substances used.
- Ensuring that all actions identified in the assessments are implemented.
- Ensuring that all employees are informed about the COSHH assessments.
- Checking that new substances can be used safely before purchasing. Where possible, always select the least hazardous product.

Manufacturers' safety data sheets for the products we use will be found in the Safety Officer's filing cabinet. Sample COSHH assessments for some of the substances and blank COSHH assessment template (that can be filled in by hand if necessary) will be found in the Risk Assessments section of this document.

3.6 Information, Instruction or Supervision

The company is required to display a Health and Safety Law poster in its office. The Health and Safety Executive updated the existing poster in April 2009 and all businesses should now replace old posters with the new poster, which looks like this:



In addition:

- Health and safety information is issued by the Safety Officer.
- Health and safety advice is available from the Safety Officer.
- Supervision of young workers/trainees will be arranged, undertaken and monitored by the Safety Officer.
- The Safety Officer is responsible for ensuring that employees who visit site are given relevant health and safety information.

Specific risk assessments will be prepared for employees identified as being vulnerable, particularly young people under the age of 18, taking into account their inexperience, lack of awareness of risks and physical immaturity, etc.

3.7 Competency for Tasks and Training

The Safety Officer will:

- Provide induction training and job specific training for all employees.
- Ensure that all employees have an understanding of health and safety regulations and understand and follow safe working practices.

Training:

- Will be identified, arranged and monitored by the Managing Director and the Safety Officer.
- Records are kept in the Company office by the Safety Officer, to show who has been trained and when, so that refreshers can be arranged as necessary.

All employees are given health and safety induction training when they start work, covering basic safe working practices. Health and safety training will also be provided when risks change or in accordance with new regulations and codes of practice.

3.8 Personal Protective Equipment (PPE)

PPE is defined as all equipment (including clothing that gives protection against the weather) which is intended to be worn or held by a person at work and which protects him against one or more risks to his health or safety, e.g. hard hats, gloves, eye protection, high-visibility clothing and safety footwear. Hearing protection and respiratory protective equipment provided for most work situations are not covered by these regulations because they are covered by other regulations; these items need to be compatible with any other PPE provided, however.

The main requirement of the regulations is that this equipment is to be supplied and used at work wherever there are risks to health and safety that cannot be adequately controlled in other ways. The Regulations also require that PPE:

- Is properly assessed before use to ensure it is suitable;
- Is maintained and stored properly;
- Is provided with instructions on how to use it safely; and
- Is used correctly by employees.

Remember: personal protective equipment is always a last resort – not a substitute for a safe system of work!

While on site, all employees will wear the appropriate personal protective equipment (PPE). Most of the time, this will consist of:

- Steel or composite toe-capped boots (compliant with EN 345/ISO20345).
- Hard hats – these must be worn during all activities being carried out at height. They also need to be worn if work is being carried out overhead, or if services are located overhead. Site rules may dictate that workers wear a hard hat and other personal protective equipment at all times whilst on site, and if this is the case the rule should be obeyed regardless of the perceived risks.
- Ear defenders. Ear defenders are compulsory when the noise level is above 85 decibels. If you need to shout to make people 1 metre away hear you, ear defenders must be worn. **ALL** people exposed to the noise need to wear ear defenders, not just the person doing the job.

Ensure PPE is properly stored, kept clean, and maintained in accordance with the manufacturer's maintenance schedule.

Note: misuse of Personal Protective Equipment is not acceptable any circumstances and may result in disciplinary action.

3.9 Accidents, First Aid, Work-Related Illnesses and Reporting

In the office, a fully stocked first aid box will be found in the reception area filing cabinet. It is recommended that every individual who attends site carry a personal first aid kit, e.g. in a toolbag or vehicle. All employees are aware of basic first aid procedures. The contents of each box should be checked at regular intervals.

A minimum stock of first-aid items would include:

- A leaflet giving general guide on first aid
- 20 individually wrapped sterile adhesive dressings (assorted sizes)
- Two sterile eye pads

- Four individually wrapped triangular bandages (preferably sterile)
- Six safety pins
- Six medium-sized (approximately 12 cm x 12 cm) individually wrapped sterile unmedicated wound dressings
- Two large (approximately 18 cm x 18 cm) sterile individually wrapped unmedicated wound dressings
- One pair of disposable gloves.

Items should be re-stocked as they are used and any deficiencies should be reported to the responsible person, Mrs J Venables, so that new supplies can be organised.

All employees must report all accidents, cases of work-related ill health or injury as soon as possible to the Safety Officer so that they can be recorded using form VA\ACC.001 (found in the folder with the first aid box) and remedial action be taken, if appropriate. If an accident occurs on site, this should also be reported in the same way and also reported in accordance with the site procedure.

The Managing Director is responsible for reporting accidents, diseases and dangerous occurrences in accordance with Reporting of Injuries Diseases and Dangerous Occurrences Regulations (RIDDOR) to the enforcing authority. Incidents should be reported as soon as possible by telephone on 0845 300 9923 or on-line at www.hse.gov.uk/riddor.

Reportable injuries include:

- Death or major injury including accidents when a member of the public is killed or taken to hospital;
- Fracture other than to fingers, thumbs or toes;
- Amputation;
- Dislocation of the shoulder, hip, knee or spine;
- Loss of sight (temporary or permanent);
- Chemical or hot metal burn to the eye or any penetrating injury to the eye;
- Injury resulting from an electric shock or electrical burn leading to unconsciousness or requiring resuscitation or admittance to hospital for more than 24 hours;

- Any other injury: leading to hypothermia, heat-induced illness or unconsciousness; or requiring resuscitation; or requiring admittance to hospital for more than 24 hours;
- Over-seven-day injury which is not major but results in the injured person being away from work or unable to do the full range of their normal duties for more than seven days (including any days they wouldn't normally be expected to work such as weekends, rest days or holidays) not counting the day of the injury itself;
- Accidents connected with work (including acts of physical violence);
- Some work-related diseases.

If something happens which does not result in a reportable injury, but which clearly could have done, it may be a dangerous occurrence which must be reported immediately (e.g. by telephone) to the enforcing authority.

If an accident (or "Loss incident") occurs which is not reportable under RIDDOR, the Safety Officer and Managing Director will be responsible for investigating and for implementing remedial action.

3.10 Monitoring

The Safety Officer is responsible for monitoring the work practices of employees and will:

- Investigate accidents.
- Investigate work-related causes of sickness absences.
- Act on investigation findings to prevent a recurrence.

3.11 Emergency procedures - fire and evacuation

In the office, the Safety Officer will make weekly checks of escape routes to ensure that these are clear and unobstructed. Fire extinguishers will be inspected and maintained on a yearly basis by the building landlord. The building landlord will carry out regular testing and inspection of the fire detection and alarm system.

All employees will be issued with a copy of the following by the Safety Officer on employment and on document revision:

- Staff fire action ref: CI 3895 A
- Staff fire notice ref: CI 3895 D
- Escape routes and assembly point drawing No. 6131
- Escape route drawing nos. VA/FIR.002/VA/FIR.003.

Regular fire drills will be carried out by the Safety Officer. The minimum requirement is for these to be carried out on an annual basis. They should be monitored and timed, and the results recorded on the Fire Drill Record form. If necessary, the fire drill should be re-run to iron out difficulties or to ensure that all staff are able to participate. Fire arrangements should be reviewed if the layout or function of the building is changed.

Any employee who attends site must familiarise themselves with the site fire evacuation procedures, including any procedures that are specific to the site, and follow them in the event of a fire. Exit routes must be kept clear at all times. Staff should be made aware in advance of the nature of the alarm signal that they can expect to hear, whether this is a bell, claxon or shout of "Fire". This needs to be clearly audible above other noise on the work site.

In the event of a fire on site:

- Raise the alarm so that the premises can be evacuated.
- Contact the emergency services - telephone "112" or "999" UNLESS the site operates a different procedure. Be aware that on some major sites, during working hours, security may be the first port of call as they will contact the emergency services and arrange to escort them to the appropriate area.
- Tackle the fire with a portable fire extinguisher if trained and if it is safe to do so.
- Do not risk your own health and safety.
- Evacuated people should muster together at a safe distance from the building and report to the Safety Officer or the senior Venables Associates employee present.

If the location where site works are being carried out is evacuated, the person in charge of the Venables Associates works must account for all Venables Associates employees and report to the site management, and report to the Safety Officer as soon as possible.

The Safety Officer is responsible for ensuring that any fire extinguisher supplied for the use of the Company's staff is serviced annually to the latest standard by a BAFE (British Approvals for Fire Equipment) registered company. Fire extinguishers in the office are the responsibility of the landlord, nonetheless the Safety Officer should check that this has been carried out as scheduled and contact the landlord if not.

After a fire extinguisher has been used, even if only partially, it must be recharged according to the manufacturer's instructions – again, the Safety Officer may need to arrange this through the landlord.

In the event that it is necessary to call the emergency services, employees are advised to dial 112 – the European emergency number – BEFORE ATTEMPTING TO DIAL 999.

The new number enables the emergency services to pinpoint the caller's location with greater accuracy – which can save lives in certain circumstances.

Note: some new mobile 'phones are not programmed to recognise "999" and it is possible that the old emergency services number may be phased out at some point in the future.

The new number operates throughout the European Union (traditionally, individual countries had their own emergency numbers and some, like France, had different numbers to dial depending on which emergency service was needed).

3.12 Welfare Facilities

Good welfare facilities can have a positive benefit on health and well-being and can help prevent dermatitis and other work-related medical conditions.

The term "Welfare" refers to the following facilities:

- Toilets
- Washing facilities
- Changing areas

- Storage facilities
- Rest/eating areas
- Drinking water
- Heating.

The client or principal contractor provides welfare facilities when project works are being carried out in an existing building or other fixed construction site.

Always wash hands and face after work and before any eating, drinking or smoking.

3.13 Site security

When working on site, all Venables Associates personnel are to follow official site procedure for entry to and exit from site, for example, report to main reception on arrival and sign in and out of the site registration book. All Venables Associates personnel must comply with the client's security requirements which may include searches of possessions and vehicles. Tools and equipment will not be left lying around when not in use.

Details of our clients, their activities and of their sites will be treated as confidential by all staff. Failure to respect the confidentiality of Venables Associates' clients may result in disciplinary action.



Applicable regulations include:

Health and Safety at Work Act 1974

The Management of Health and Safety Regulations 1999

The Construction (Design and Management) Regulations 2007

The Reporting of Injuries, Diseases, and Dangerous Occurrences Regulations 1995

The Health and Safety (First Aid) Regulations 1981

The Personal Protective Equipment Regulations 1992



Further information can be found in the following leaflets and HSE publication:

Health and Safety Law: What you should know

Health and safety regulation... a short guide

Managing Health and Safety in Construction

A short guide to the Personal Protective Equipment at Work Regulations 1992

RIDDOR Explained

Basic advice on first aid at work

First aid at work: your questions answered

4 KEY AREAS OF RISK

The key issues and hazards affecting the health and safety of employees through the work activities include:

- Slips, trips and falls
- Falls from height
- Fixed scaffolding
- Mobile scaffold towers
- Fragile roofs and surfaces
- Noise
- Manual handling
- Work in control panels
- Electrical isolation
- Portable appliances
- Legionella
- Hazardous substances (COSHH)
- Dust
- Cuts and minor injuries
- Burns
- Asbestos
- Fire
- Driving on public roads
- Vulnerable employees
- Confined spaces
- Lone working
- Alcohol and drugs
- Smoking
- Horseplay
- Display screen equipment
- Stress.

These areas are examined in more detail in the pages that follow. Other areas of risk that are not covered here should nonetheless be addressed in site specific risk assessments and method statements.

Slips, trips and falls

Venables Associates staff often attend meetings and carry out work on construction sites where work is in progress.

- **Remember: a tidy site is a safe site. Slips, trips and falls are the commonest causes of injury on construction sites.**
- Keep alert for trailing cables and other trip hazards, including raised sections of floor.
- If lighting is not adequate to permit safe working, inform the Safety Officer.
- Use appropriate access equipment for working at heights, ensuring that it is positioned on level ground.
- Look out for spills of water and other liquids – if necessary, asked for them to be cleared up. Note that dusty substances can also cause you to slip over.
- Look out for flooring that is uneven or damaged.



Applicable regulations include:

Health and Safety at Work Act 1974

Falls from height

- **Remember: falls from height are the biggest killer on the UK's construction sites - every fortnight one construction worker is killed as a result of falling from height.**
- All work at height will be done in accordance with The Work at Height Regulations 2005.
- Use appropriate work platforms and access equipment for working at heights – ladders are not designated as work platforms.
- When using a ladder, you should always have three points of contact – tools and materials should be carried in a suitable holster or raised by mechanical means.
- Ensure work platforms and access equipment are positioned on level ground and guard-rails and toe-boards etc are in place to prevent people, materials and tools falling.
- Work platforms must not be overloaded; the weight of operatives and materials will be considered to ensure they are not overloaded.

- Getting on and off a roof presents a major risk. A secure means of entry and exit is vital. If there is any possibility of falling, a correctly fitted harness must be worn.
- Do not work on roofs in icy, rainy or windy conditions – because of the risk of being blown off the roof or slipping.
- Remember that working next to an aperture, e.g. an access hatch, also counts as working at height. Appropriate control measures must be in place before work commences, e.g. ensure that the edge is protected with barriers (without creating an additional a trip hazard): it is easy to step back and fall through.

Fixed scaffolding

Only use fixed scaffolding that has been designed and erected by a competent scaffolding contractor. Only people who are trained and competent are allowed to design, erect and dismantle scaffolding.

Under no circumstances must employees of Venables Associates attempt to modify or interfere with fixed scaffolding.

Visually inspect the scaffolding before climbing it, and seek advice from a person who is trained and competent in scaffold inspection, in the event that anything happens that could affect the stability of the scaffold, e.g. being struck by a vehicle, high winds or if you suspect that the scaffolding is in any way deficient. A non-scaffolder who has attended a suitable scaffold inspection course and has the necessary background experience would be considered competent to inspect a basic scaffold (e.g. a site manager).

Fixed scaffolding must be blocked off or rendered inaccessible when not in use.

Mobile scaffold towers

Mobile scaffold towers must be erected by a competent person and sited on ground that is firm and level. In addition:

- Never climb up the rungs on the end frames of a mobile scaffold tower unless the rungs have been designed for getting to and from the working platform.
- Never use a mobile scaffold tower or scissor lift as a support for ladders, trestles or other access equipment.
- Always check that the wheels are locked when a mobile scaffold tower is in use.
- Never climb a mobile scaffold tower with missing/broken parts or incompatible components.
- Never use this equipment in weather conditions that are likely to make it unstable.
- When not in use, mobile scaffold towers or scissor lifts should be secured or blocked off to prevent unauthorised access.

Fragile roofs and surfaces

Sometimes it may be necessary to travel across a roof for access purposes, e.g. to carry out a survey. A fragile material is one that does not safely support the weight of a person and any load they are carrying - the fragility of a roof does not depend solely on the material it is made from. The following factors are also important:

- Thickness of the material;
- The span between supports;
- The type, number, position, condition and quality of fixings;
- The design of the supporting structure, e.g. the purlins;
- The age of the material.

Sometimes the entire roof surface is fragile, in other cases only part of the roof is fragile, e.g. when fragile roof lights are contained in an otherwise non-fragile roof. Sometimes a roof is not as sturdy as it appears to be, for instance when old roofs have been painted over.

The fragility, or otherwise, of a roof **MUST** be confirmed before you set foot on it. If there is any doubt, the roof should be treated as fragile unless, or until, confirmed that it is not: ***it's dangerous to assume that a roof is non-fragile without checking this out beforehand.***

At NO time may any Venables Associates employee pass over fragile material, unless platforms, coverings or other similar means are provided that adequately support them: properly installed safety netting beneath the roof surface will provide collective fall protection within the protected area. Protection is also needed when anyone passes by or works nearer than 2 metres to fragile materials.

The following control measures should also be noted:

- Support platforms should be 600 mm+ wide – make sure that they are long enough to provide adequate support across roof members (spanning at least two purlins).
- Using a platform may spread the load, but that will not provide enough support if the only thing supporting it is the fragile materials.
- Walking on the lines of purlin bolts gives no protection at all - it is like walking a tightrope and must never be allowed or condoned.
- You should not have to constantly move platforms about the roof - it is not acceptable to rely on using a pair of boards to 'leap-frog' across a fragile roof. Make sure there are enough platforms provided to avoid this.
- Precautions are needed to prevent a person falling from the platform – e.g. edge protection comprising top rail, intermediate rail (or equivalent protection) and toe board.
- Boundaries least 2 metres from the nearest fragile material can sometimes be used to identify 'safe' areas containing the workplace and routes to and from it. If this is the case, you must stay inside the safe area at all times.



Applicable regulations include:

Health and Safety at Work Act 1974

Work at Height Regulations 2005



Further information can be found in the following leaflets and HSE information sheet:

The Work at Height Regulations 2005 - A brief guide

Heightsafe

Noise

The Control of Noise at Work Regulations 2005 came into force on 6 April 2006. Most office work is unlikely to cause high noise levels (although machinery such as a franking machine may do so), but other work activities such as working in a plant room with operational plant may create conditions requiring action to be taken.

- The lower exposure action value is 80 decibels (80dB). Hearing protection must be provided if an employee requests it. The peak sound pressure is 135 dB.
- The upper exposure action value is 85 dB and hearing protection must be provided and worn. The peak sound pressure is 137 dB.
- The exposure limit value is 87 dB. The peak maximum is 140 dB.

As a rough guide, if you need to shout to be heard by a person 2 metres away, the noise level is approximately 80 decibels and hearing protection is recommended. If you need to shout to be heard by a person 1 metre away, the noise level is approximately 85 decibels and hearing protection must be provided and worn.

The noise output of most power tools in normal use is such that hearing protection should always be worn by the user and anyone else in the vicinity. Equipment that is old or in need of repair will have a higher noise output.

All people exposed to the noise must wear hearing protection.



Applicable regulations include:

Health and Safety at Work Act 1974
Control of Noise at Work Regulations 2005



Further information can be found in the following leaflets:

Noise at work: guidance for employers on the Control of Noise at Work Regulations 2005

Manual handling

Manual handling should always be avoided wherever possible but inevitably manual handling issues will be encountered when lifting and fitting heavy and bulky items – even moving a printer or a box of paper in the office. Every person has a different carrying capacity. Where possible, manual handling should be mechanised, e.g. put boxes of paper on a trolley.

Manual handling will be done in accordance with the Manual Handling Operations Regulations 1992 (amended 2002):

- Carry out a manual handling assessment of all tasks to identify what has to be lifted, the distance and the duration. Organise deliveries to avoid unnecessary carrying.
- Organise work activities so that manual handling is broken down into manageable actions of short duration.
- Do not attempt to handle loads exceeding 20Kg on your own.
- Use the kinetic lift: bend knees, keep back straight, keep load close to the body.
- Use two people to carry heavier or awkward loads.

Listen to what your body is telling you: if you feel your back, neck, limbs, etc. start to strain, stop and think about what you are doing and see if you can get help or do it a different way. In particular, never use a practice known as “Stoop lifting” where one foot is raised with the leg extended behind. This places enormous strain on the back. The Safety Officer is responsible for carrying out manual handling assessments.



Applicable regulations include:

Health and Safety at Work Act 1974

Manual Handling Operations Regulations 2002



Further information can be found in the following leaflets:

Getting to grips with manual handling: A short guide

Work in control panels

Control panels can be complex and sophisticated. Overseeing testing, commissioning and other work inside control panels must only be carried out by trained, competent persons, in accordance with the Electricity at Work Regulations 1989.

Effective planning is essential for this kind of work: make sure that you have the most up to date drawings and written procedures available, and work in accordance with them. If no information is available, isolate the panel effectively using suitable control measures, before starting work. Whether the panel is new or old, always proceed with caution and treat the equipment with respect.

Before opening the panel door(s), look for damage or other signs that the isolating mechanism has been disabled or tampered with.

Always be aware that control panels may have multiple sources of supply or back feeds.

Work in control panels that are live must only be carried out as a last resort and when all internal components are rated IP20 (touch-proof) or are covered with other suitable shrouds.

New control panels

New panels should be touch-proof, but be aware that automatically operated electrical equipment that operates the building control system may start up automatically without warning and cause crush injuries or other harm. Ensure that the necessary controls are in place before proceeding.

Existing control panels

Expect the unexpected. On older control panels:

- Drawings may not be available – accurate or otherwise.
- Depending on the age of the equipment, it can be easy to touch live components inadvertently. Don't touch anything or expose components if there is a risk that you could touch live terminals. If necessary, temporary

panels or guards should be fitted to shield live parts: for example, a dropped spanner or screwdriver could cause the equipment to explode with devastating consequences, if it is not built to withstand a major fault.

- The equipment may be fitted with a “defeat” mechanism to allow for the testing of components and relays. Check that this is operational, in case of tampering/failure.
- Don’t trust labelling – it may not be an accurate or up to date indication of what’s inside.

If the panel is clearly of an older design, of unknown age or condition, the isolators may be interlocked with the door mechanism.

If in doubt about any control panel, turn it off before you open any doors. Then carry out a thorough investigation and a dynamic risk assessment before proceeding.



Applicable regulations include:

Health and Safety at Work Act 1974

Electricity at Work Regulations 1989

Provision and Use of Work Equipment Regulations 1999 (PUWER)



Further information can be found in the following leaflets:

Electrical safety and you

Electrical isolation

By law employers must ensure that all employees involved in work on electrical equipment are competent. Employees must be instructed on, and trained in, the implementation of safe systems of work. The safe system of work includes written rules and using locking-off devices and notices.

Definition of “Low Voltage”

In the UK, any electrical supply that is between 50V AC and 1000V AC is defined as “low voltage”. Standard low voltage supplies in the UK are 230V AC single phase and

400V AC three phase. The correct name for the live conductor is "phase". A single phase supply consists of phase (live), neutral and earth conductors. Do not assume that neutral and earth are "dead". In certain conditions neutral and earth conductors can also have hazardous voltages on them, and some equipment can have more than one feed.

Effects of electric shock

An electric shock at 230V for more than half a second can kill.

A voltage as low as 50 volts applied between two parts of the human body causes a current to flow that can block the electrical signals between the brain and the muscles. This can have a number of effects including:

- Stopping the heart from beating properly
- Preventing the person from breathing
- Causing muscle spasms.

The person can also experience loss of muscle control with painful muscle spasms that can be strong enough to break bones or dislocate joints. This can make it impossible to "let go" or escape the electric shock. It may also result in further injury depending on what the person is doing: they may fall from height or onto machinery.

The exact effect depends on a number of things including the size of the voltage, which parts of the body are affected, how damp the person is, how physically fit the person is, and the length of time the current flows.

When an electrical current passes through the human body it heats the tissue along the length of the current flow. This can result in deep burns that often require major surgery and are permanently disabling. Electrical burns will produce an entry wound and an exit wound. Burns are more common with higher voltages but may occur from domestic electricity supplies if the current flows for more than a few fractions of a second.

Safe Systems of Work

Key Regulations

Regulation 12 of The Electricity at Work Regulations 1989 covers the means of isolation.

Regulation 13 covers precautions for work on equipment made dead.

Regulation 14 requires that no person shall be engaged in any work activity on or so near any live conductor that danger may arise.

The point in an electrical circuit where the electrical supply is isolated is called "the point of isolation". It needs to be under the control of the person carrying out the work to prevent the supply being reinstated. Warning notices must be used at the point of isolation and the conductors must be proved to be dead before they are touched.

The point of isolation must always be secured to prevent it being interfered with and the supply being reinstated by others. Even when the point of isolation is directly adjacent to the equipment being worked on it should be secured as a matter of course to prevent the supply being reinstated inadvertently. Also, the person doing the work may need to move on to work on other equipment connected to the same supply, and may forget to secure the point of supply if that is not done at the beginning of the job.

Some fused connection units (such as MK Electric white plastic or metalclad versions) can be locked with a padlock as shown in the photographs 1 and 2. Where this is not possible then a lockable cover as shown in the photograph 3, available for approximately £5.00 from www.reecesafety.co.uk, can be fitted (note: the cover screws need to be removed to fit the lockable cover and this must only be done by a trained, competent qualified electrician). Insulation tape with "do not touch" or similar written on it is NOT adequate.



Photograph 1



Photograph 2



Photograph 3

Do not just rely on others to tell you that the electrical supply is isolated. If others are isolating the supply for you then check it is done and the point of isolation has been properly secured and it cannot be reinstated.

Once the electrical supply has been isolated and the point of isolation has been secured then the equipment to be worked on must always be tested to prove that the electrical supply has been isolated. The tester used must be proved to be working correctly with a known voltage source. This must be done without exposing the worker to a hazard. Once the tester is proved, test the incoming supply terminals of the equipment to be worked on. Put one lead of the tester on the earth terminal first, then the other lead on the phase (live) terminal. Also test earth to neutral and neutral to phase to ensure that there is no hazardous voltage on any terminal. Once the equipment to be worked on has been tested to prove that the electrical supply has been isolated the tester used must again be proved to be working correctly with a known voltage source without exposing the worker to a hazard. Using a mains tester with fused test leads and retractable shrouds on the leads, with a proving unit, as supplied by Martindale, is recommended.

Once the work is complete the equipment covers must be reinstated and secured before the electrical supply is reinstated.



Applicable regulations include:

Health and Safety at Work Act 1974

Electricity at Work Regulations 1989

IEE 17th Edition Wiring Regulations 2008

Provision and Use of Work Equipment Regulations 1999 (PUWER)



Further information can be found in the following book:

Requirements for electrical installations: IEE 17th Edition Wiring Regulations 2008 – BS 7671: 2008

Portable appliances

Venables Associates staff use a variety of electrical appliances in the office and on site. Equipment that has a lead (cable) and plug and which is normally moved around or can easily be taken from place to place, is referred to as a portable appliance (the term also covers office equipment, e.g. photocopiers, desktop computers, etc.): if it is not properly inspected and maintained, portable electrical equipment can pose a risk of electrocution. Control measures are as follows:

- Always visually inspect electrical equipment before use. Don't use anything that appears damaged, e.g. equipment with a cracked casing or that has been tested and has a "FAIL" sticker. Do not attempt to fix broken equipment yourself: report damaged equipment to the Safety Officer, so it can be repaired by a competent person/replaced. Prevent others from using it.
- Machinery and equipment should be CE marked. Installations and appliances must be properly maintained in a safe condition.
- The Safety Officer is responsible for arranging for a competent person to test electrical installations/portable appliances. Portable appliances should be tested at least annually - more often if there's a high level of wear and tear. All work equipment must be maintained in an efficient state, in efficient working order and in good repair.
- Extension leads are particularly prone to wear and tear and should be visually inspected every time they are used.



Applicable regulations include:

Health and Safety at Work Act 1974

Electricity at Work Regulations 1989

IEE 17th Edition Wiring Regulations 2008

Provision and Use of Work Equipment Regulations 1999 (PUWER)



Further information can be found in the following leaflets:

Electrical safety and you

Electrical safety in construction

Maintaining portable electrical equipment in offices & other low-risk environments

Legionella

Legionella is a potentially fatal pneumonia caused by legionella bacteria and is the most well-known and serious form of a group of diseases known as legionellosis.

Infection is caused by inhaling small droplets of contaminated water, which are too small to be seen with the naked eye. It cannot be passed from one person to another. Vulnerable groups include smokers, heavy drinkers, those aged 45+ and individuals whose immune systems are already impaired. Men are more vulnerable than women, due to the larger surface area of the lungs.

As well as natural water courses, legionella are widespread in the environment and may contaminate and grow in other water cooling towers, plant rooms, hot and cold water services and spa baths. They survive low temperatures and thrive at temperatures of between 20°C-45°C if the conditions are right, e.g. if a supply of nutrients is present. This could include rust, sludge, scale, algae, skin cells and other bacteria. They are killed by high temperatures.

If work is to be carried out in an area where air-borne water droplets could be present, check in advance that a regular regime of water hygiene is in place, in accordance with the statutory requirements. If this is not the case, work must not be carried out until control measures are in place or water hygiene arrangements are in place.

Work in accordance with the Legionnaire's Disease: The control of legionella bacteria in water systems (Approved Code of Practice L8). This gives practical advice on the requirements of the Health and Safety at Work etc Act 1974, and the Control of Substances Hazardous to Health 1999 Act, concerning the risk from exposure to Legionella bacteria.

New systems must be designed with reference to the Approved Code of Practice L8. Prior to commencement of installation, a schematic diagram of the proposed facility should be submitted to the client, together with details of what the method of legionella control will be and a draft legionella risk assessment. At completion, the as-built version of the diagram must be issued.



Applicable regulations include:

Health and Safety at Work Act 1974



Further information can be found in the following leaflets:

Water Hygiene Regulations

Legionnaire's Disease: A guide for employers

Hazardous substances (COSHH)

Using chemicals or other hazardous substances at work can put people's health at risk, so the law requires employers to control exposure to hazardous substances to prevent ill health. Employers have a specific duty to protect both employees and others who may be exposed by complying with the Control of Substances Hazardous to Health Regulations (COSHH) 2002 (as amended 2009). COSHH sets eight basic measures that employers, and sometimes employees, must take:

- Assess the risks.
- Decide what precautions are needed.
- Prevent or adequately control exposure.
- Ensure that control measures are used and maintained.
- Monitor the exposure.
- Carry out appropriate health surveillance.
- Prepare plans and procedures to deal with accidents, incidents and emergencies.
- Ensure employees are properly informed, trained and supervised.

If exposure to hazardous substances is not adequately controlled, employees or others may be harmed, perhaps permanently. Effects from hazardous substances range from mild eye irritation to chronic lung disease or, on occasions, death.

Hazardous substances include:

- Substances used directly in work activities (e.g. cement, adhesives, paints, lubricating oil, cleaning agents).
- Substances generated during work activities (e.g. fumes from soldering and welding).
- Naturally occurring substances (e.g. grain dust).
- Biological agents such as bacteria and other micro-organisms.

Hazardous substances are found in nearly all work environments. Coming into contact with a hazardous substance may produce a variety of adverse effects on health:

- Skin irritation or dermatitis following skin contact – this can be so debilitating that the individual is forced to change their occupation or even give up work altogether
- Asthma as a result of developing allergy to substances used at work. Once the lungs are sensitized in this way, an attack may be triggered by the most minimal exposure. Again, this can have life-changing consequences.
- Losing consciousness as a result of being overcome by toxic fumes
- Cancer, which may appear long after the exposure to the chemical that caused it
- Infection from bacteria and other micro-organisms (biological agents).

When planning or carrying out work, things to look out for and do when using any chemical product are as follows:

- **Look for the orange warning label.**
- Only use a substance for the purpose for which it was intended.
- Replace the cap properly when the product is not being used.
- Keep the product in the manufacturer's original container and keep the label on it.
- Always use and store the product in accordance with the manufacturer's instructions, e.g. out of direct sunlight, use in a well-ventilated area.
- Avoid mixing chemicals together – this can lead to the production and release of gases or other substances which may in some cases be dangerous.
- Clear up spills promptly and effectively, using the method and personal protective equipment shown in the manufacturer's safety data sheet or on

the label (e.g. place sand over spilt liquid, use suitable protective gloves, goggles to prevent splashes, etc.).

- Ensure appropriate measures are in place for the storage of flammable substances, if these are to be kept on site.
- Don't stockpile chemicals, e.g. cleaning materials. Only keep and store the minimum number of types of product.
- When choosing new chemical products, ALWAYS choose the least hazardous product for the job.

New substances must not be bought or used until a suitable COSHH assessment has been carried out. Four sample COSHH assessments have been supplied with this policy (see Appendix 1 – Risk Assessments and Method Statements), for SF6 Sulfur Hexafluoride refrigerant gas, anti-static general purpose fluid, battery acid electrolyte, and transformer oil. A list of hazardous substances stored or used on site is kept by the Safety Officer, together with each product's manufacturer's safety data sheet: this should be given to the fire service in the event of fire.

The appropriate COSHH data sheets or risk assessments should be attached to task risk assessments and method statements on site. If you are asked to use a product in the course of your work and are not shown the relevant COSHH information, contact the Safety Officer and ask for a COSHH assessment to be carried out or for an alternative product (for which a COSHH assessment is available) to be substituted.



Applicable regulations include:

Health and Safety at Work Act 1974

Control of Substances Hazardous to Health Regulations (COSHH) 2002



Further information can be found in the following leaflets:

Working with substances hazardous to health: What you need to know about COSHH

Dust

Always wear an appropriate dust masks when carrying out any work in a dusty environment, e.g. working inside an old control panel. Ensure that the masks are the right type for the work being done. Keep the mouth side of the mask clean and free from any contamination. **ALL** people exposed to the dust need to wear goggles and masks, not just the person doing the job.



Applicable regulations include:

Health and Safety at Work Act 1974

Control of Substances Hazardous to Health Regulations (COSHH) 2002



Further information can be found in the following leaflets:

A short guide to the Personal Protective Equipment at Work Regulations 1992

Cuts and minor injuries

Always wear appropriate clothing for work sites: hard hat, shirt and long trousers (or overalls), coat as required, steel/composite toe capped footwear.



Applicable regulations include:

Health and Safety at Work Act 1974



Further information can be found in the following leaflets:

Basic advice on first aid at work

Burns

Parts of equipment, e.g. generator casings and exhaust manifolds can become very hot and can cause burns if touched. The increased temperature can be felt a metre from the equipment. Ensure that unauthorised personnel are kept out of plantrooms

and stick to safe zones, if these have been marked out on floors. Allow hot equipment chance to cool before starting work on it.



Applicable regulations include:

Health and Safety at Work Act 1974



Further information can be found in the following leaflets:

Basic advice on first aid at work

Asbestos

Work with asbestos can release small particles into the air. When inhaled, these can cause a number of incurable diseases which currently account for around 3,500 deaths in the UK every year. The first symptoms can occur 15-60 years after exposure.

The UK banned use of brown and blue asbestos in 1985, and white asbestos in 1999 (apart from a number of specialised uses). Asbestos in different forms was common in buildings constructed pre-1980, for example in ceiling tiles and textured finishes.

All commercial property, should have an asbestos register detailing where it is in the building and what type it is. Refer to this and the building management personnel for further information. Any asbestos in buildings should be labelled. Labels can fall off or be removed, however, so it's a good idea to know what to look out for.

Asbestos is found in:

- Old control panels, as an insulator.
- Sprayed asbestos/loose packing - generally found as fire breaks including ceiling voids.
- Moulded or preformed sprayed coatings and lagging (e.g. thermal insulation pipes and lagging).
- Sprayed asbestos mixed with hydrated asbestos cement - used for fire protection purposes, e.g. in ducts, firebreaks, ceiling panels etc.
- Insulation boards for fire protection, thermal insulation, partitions/ducts.

- Compressed asbestos cement products – usually flat or corrugated sheets, e.g. roof/wall cladding, gutters, rainwater pipes, water tanks.
- Asbestos cement.

Only HSE licensed contractors are allowed to remove certain types of asbestos.

If you suspect asbestos is present:

- If you find hidden/dusty materials, inform the Safety Officer immediately.
- The Safety Officer will refer to the responsible person for further information.
- If asbestos is present but is undamaged/undisturbed/in good condition, it may be safe to continue work.
- Damaged asbestos or asbestos in poor condition must be removed by a specialist contractor.

If accidental exposure occurs whilst work is in progress, stop work and inform the Safety Officer immediately, then:

- Wash hands, forearms and face straight away - especially before eating, drinking or smoking.
- Change your clothing.
- Do not resume work until told by the Safety Officer that it is safe to do so.
- Do not recommence work until specialist work or removal has been carried out (if necessary).
- If necessary, a new risk assessment must be in place. Only resume work once you have been shown it and agreed in writing to work in accordance with it.
- Control measures must be in place before re-commencement.

Most asbestos removal work must be undertaken by a licensed contractor. Work is only exempt from licensing if the exposure of employees to asbestos fibres is sporadic and of low intensity.

Asbestos is not hazardous if left well alone and not disturbed or damaged.



Applicable regulations include:

Health and Safety at Work Act 1974
The Control of Asbestos Regulations 2006



Further information can be found in the following leaflet:


Asbestos dust kills: keep your mask on

Fire

The effects of fire can be catastrophic and can include:

- Death or injury to people.
- Damage to property, vehicles and equipment.
- Loss of money to business and sometimes total business closure.
- Late running of projects.

The fire triangle shows the three elements fire needs to start:

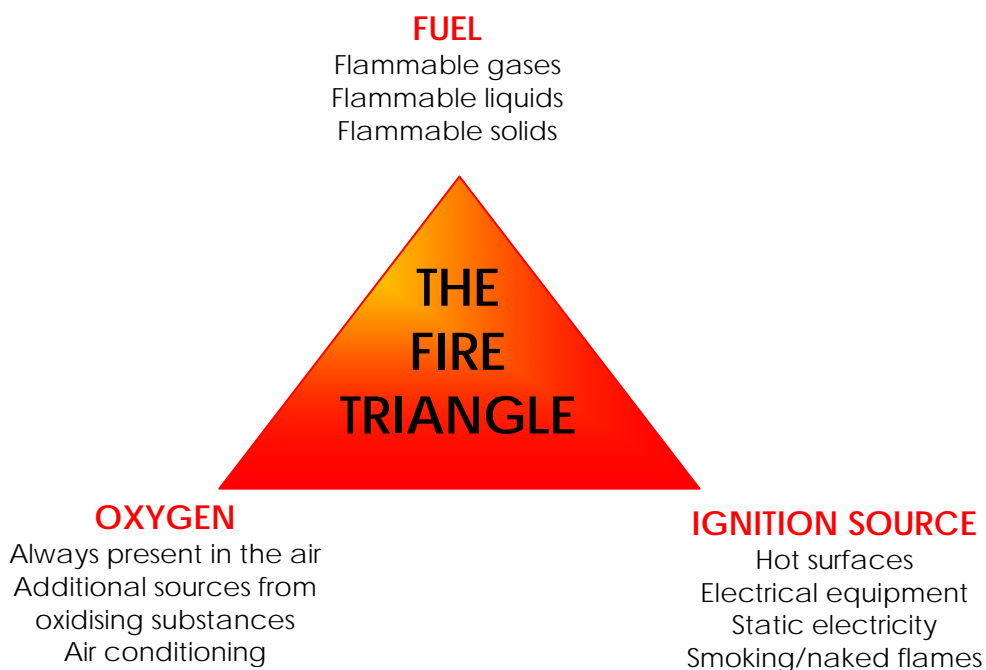

Remove any one of the three components and fire cannot burn – think:

1. Reduce.
2. Remove.
3. Replace.

Everyone needs to be aware of the risk of fire and how to avoid it. We can all use simple measures to prevent fire, for example:

- Don't have any naked flames or other sources of ignition.
- Don't allow rubbish to build up in the office. Keep all materials stored safely and keep escape routes clear.
- Check substances such as cleaning materials to determine if they are flammable. Flammable items must be stored in a safe manner in accordance with the manufacturer's literature.
- Remember that many fires, especially in schools, happen as the result of arson. Don't make life easy for an arsonist.
- Whether on site or in the office, never bring to work old equipment, for example, kitchen appliances, a radio, or Christmas lights, as this is a potential fire hazard.
- Smokers should smoke only in designated smoking areas and should dispose of used smokers' materials in the receptacles provided.

If it is necessary to use a fire extinguisher (e.g. if the fire is between you and the only exit), only use the correct fire extinguisher for the type of fire. Using the incorrect fire extinguisher could make a bad situation worse:

- Use a water fire extinguisher on wood, paper or textile fires. Do not use a water extinguisher on electrical or liquid fires.
- Use a carbon dioxide (CO₂) extinguisher on electrical or liquid fires.
- Use a foam extinguisher on liquid fires. Do not use a foam extinguisher on electrical fires.

Only fight small fires, large fires should be left to the fire service.

Fire Risk Assessment uses the same hierarchy of control as other forms of Risk Assessment:

Heirarchy of control	Site - example	Office - example
Avoid risks	Don't have naked flames or other sources of ignition. Good housekeeping is essential .	Don't have naked flames or other sources of ignition. Good housekeeping is essential. Don't store materials such as paper close to heat, e.g. a bare lamp.
Evaluate the risks that can't be avoided	Don't make life easy for arsonists.	Carry out a fire Risk Assessment and implement action plan. Repeat annually as a minimum.
Combat the risks at source	Store materials safely. Smokers must smoke only in the designated areas and dispose of smokers' materials responsibly, in the designated receptacles.	Store materials safely, e.g. cleaning chemicals, paper. Smokers must smoke only in the designated areas and dispose of smokers' materials responsibly, in the designated receptacles. Keep escape routes clear at all times. Ensure portable appliances are tested and maintained regularly by a competent person. Don't bring in electrical equipment from home.
Adapt the work to suit the individual	Ensure that any special needs are included in planning fire measures (e.g. a worker with hearing difficulties).	Ensure that any special needs are included in planning fire measures (e.g. a worker with hearing or mobility difficulties).
Adapt the work method in the light of technical progress	Review arrangements if new technology becomes available.	Review arrangements if new technology becomes available.
Replace the dangerous with the non-dangerous or the less dangerous	Select the least hazardous work process for the job.	Select the least hazardous chemical for the job.
Develop a coherent overall prevention policy	The first aim must be to prevent fire from starting.	The first aim must be to prevent fire from starting. Review fire Risk Assessment and emergency plan periodically. Carry out regular fire drills and adjust emergency arrangements as necessary.
Give appropriate instructions to employees	Find out what the emergency procedures are on arrival at site.	Use signage to show fire exits, emergency routes, fire extinguisher stations and details of emergency plan.

Remember that even when the work activities of Venables Associates may not in themselves pose a fire risk, arson is a major problem on construction sites; 90% of fires

in schools, for example, are caused by arson and nearly three quarters of those fires occur outside school hours. It is vital that you do not make life easy for an arsonist, for example:

- A skip should never be sited close to a building such that, if its contents were set alight, the fire could spread to the building.
- Wheelie bins should be locked or chained in place
- Lock away any items that could be used to start a fire or better still, remove them if at all possible.
- Never leave materials that will burn such as rubbish or packaging lying around.
- Always make sure the work site is secured when it is unoccupied so that an arsonist cannot gain access to hidden areas, roofs etc.

Whether in the office or on site, if you find a fire:

- Only fight it if you have been trained and it is safe to do so.
- Make sure you use the correct fire extinguisher for the type of fire, and NEVER use a water extinguisher on an electrical fire.
- Never put a fire between yourself and your way out.

If you hear a fire alarm the Fire Service recommends that you:

- Always assume it is a genuine fire (unless you have been told in advance that it is a drill or test).
- Assume it is a fast fire – fire can travel faster than a person can run, so get to your muster point quickly, but without running.
- Assume that the fire fighting equipment will have been tampered with – concentrate your efforts on evacuation, not fire fighting.

Fire Risk Assessments will be carried out regularly in the office by the Safety Officer. A blank Fire Risk Assessment template will be found in the "Risk Assessments and Method Statements" section. A Fire Risk Assessment must be carried out at least once each year (more frequently if risks change, e.g. if more staff join or the building function/layout changes). A record of each Fire Risk Assessment will be kept with the Health and Safety Records. The management and staff of Venables Associates will

cooperate fully with any fire Risk Assessments and drills carried out by the Principal Contractor or the Client.



Hazard warning:

There are approximately 2.5 million fires in the UK each year and members of the public deal with around 90% of them*



Applicable regulations include:

Health and Safety at Work Act 1974

*Source: Fire Service

Driving on Public Roads

While there is no specific legislation concerning driving at work, the Health and Safety Regulations require employers to ensure the safety of all employees while at work. This includes staff using their own vehicles for work purposes.

The Safety Officer is responsible for: ensuring all vehicles used by staff, including employee-owned vehicles used for work purposes are well maintained, safe, fit for their intended purposes, taxed, insured for business purposes and MOT'd; ensuring staff are fit and capable to drive them; trained, if necessary. Anyone who drives their own vehicle on Venables Associates' business - even a five minute trip to the local post office - **must** complete a Private Vehicle Record and supply up to date copies of the relevant documentation.

Around 300 drivers are killed on the country's roads every year as a result of falling asleep at the wheel. Advice from the Department of Transport to avoid tiredness while travelling on the road includes:

- Make sure you have a good night's sleep before setting off on a journey.
- Plan your journey so you stop for a 15 minute break every two hours.
- Avoid long journeys if you already feel tired.
- Share driving duties where possible.
- Find a safe place to stop if you feel drowsy.
- Drink two cups of coffee or a high caffeine drink if you feel tired.

In addition, tools and materials being carried in a work vehicle should be properly secured so that they will not present a hazard in case of sudden braking or change of direction, etc.



Applicable regulations include:

Health and Safety at Work Act 1974



Further information can be found in the following leaflets:

Driving at work - managing work-related road safety

Vulnerable employees

Employees at increased risk include:

- New employees.
- Young workers (including young people on work placements).
- Employees whose first language is not English.
- Disabled workers, people with hearing difficulties.
- Lone workers.
- Old or infirm workers, or those with on-going conditions such as diabetes.
- Pregnant workers.
- People with special needs, e.g. employees who are colour-blind.
- Employees whose immunity is reduced, e.g. due to long-term illness.

Appropriate risk assessments must be carried out for all at-risk groups.

Due to lack of awareness, knowledge, experience and physical maturity, young workers - defined as "any person who has not attained the age of eighteen" - are the most vulnerable group at work. Planning their work needs to take into account additional considerations including:

- Lifting is restricted to objects that are within their acceptable capabilities. Do not exceed 20Kg on manual handling.
- Before any young person(s) uses any hand tools their competency is assessed and approved. All tools should be inspected by a competent person prior to use to ensure they are in safe working order.
- Young Person(s) are given full training and be deemed competent before using any electrical equipment.

Under the Health and Safety at Work Act, employers have a duty to provide all employees with appropriate safety training to do their work without risk of accident or injury. Even if the Company doesn't have direct employees who are not English speakers, the well-being of others such as delivery staff needs to be safeguarded.

Measures to be in place include ensuring that suitable signage is in place, together with physical barriers where necessary, to ensure that no-one can stray into the hazard zone. If necessary, site maps could also be produced to indicate facilities such as toilets and other welfare facilities, to help visitors find their way around without putting themselves at risk.

The Health and Safety Executive publishes leaflets and other information in 20+ languages. Callers to the HSE's Infoline can, on request, also speak to advisors in languages other than English and Welsh.



Applicable regulations include:

Health and Safety at Work Act 1974

Confined spaces

A confined space can be defined as any space of an enclosed nature where there is a risk of death or serious injury from hazardous substances or dangerous conditions (e.g. lack of oxygen). Some confined spaces are fairly easy to identify, e.g. enclosures with limited openings such as enclosed drains or sewers. Others may be less obvious, but can be equally dangerous, for example ductwork or unventilated or poorly ventilated rooms, plant rooms, riser cupboards and plant rooms. Work in a confined space should only be undertaken by an operative who is fully fit (note that some people with psychological illnesses or who suffer from panic attacks may be unsuited to this kind of work).

Dangers can arise in confined spaces because of:

- A lack of oxygen.
- The presence of poisonous gas, fume or vapour which can enter the confined space from connecting pipes.
- Fire and explosions (e.g. from flammable vapours, excess oxygen etc).
- Dust, which may be present in high concentrations.
- Hot conditions leading to a dangerous increase in body temperature, e.g. working in a loft or attic in hot weather.

Some of the above conditions may already be present in the confined space. However, some may arise through the work being carried out, or because of ineffective isolation of plant nearby, e.g. leakage from a pipe connected to the confined space.

When planning work, check whether the work can be done another way so that entry or work in confined spaces is avoided. Better work-planning or a different approach can reduce the need for confined space working, for example, sometimes it is possible to have the work done from outside.

If you cannot avoid entry into a confined space, make sure you have a safe system for working inside the space. Use the results of your risk assessment to help identify the necessary precautions to reduce the risk of injury. Everyone involved will need to be properly trained and instructed to make sure they know what to do and how to do it safely. Make sure that the safe system of work, including the precautions identified,

and the method of communication between those working inside and those working outside, is developed and put into practice. Regular checks and close supervision of staff working in a confined space are vital to ensure that if there is a problem, prompt action can be taken.



Applicable regulations include:

Health and Safety at Work Act 1974
The Confined Spaces Regulations 1997

Lone working

Sometimes you may be required to work in an environment such as a plant room where you will effectively be working alone, even though others may be on the site. This type of working should only be undertaken by someone who is physically in good health. People with certain psychological disorders should not work alone, e.g. those who suffer from panic attacks.

Control measures include informing the office of your whereabouts and when you expect to return, regular check-ins with your line-manager/the office. Also, before commencing work on a client's site, establish the emergency procedures and reporting lines, including telephone numbers for relevant contacts, e.g. the building management.



Applicable regulations include:

Health and Safety at Work Act 1974
The Management of Health and Safety at work Regulations 1999

Alcohol and drugs

Alcohol and drugs will not be permitted on site or in the office. Ian Venables requires all workers employed by Venables Associates on site to be fit for work and will remove any person suspected of being under the influence of drugs or alcohol. If you need to take prescription medication, please inform Ian Venables as this may affect your performance, e.g. your ability to drive or make decisions.



Applicable regulations include:

Health and Safety at Work Act 1974

Smoking

The Department of Health says that “Smoking is the principle avoidable cause of premature death in the UK, killing more than 120,000 a year”. Even if an individual chooses not to smoke, research shows that there is no safe level of exposure to second-hand smoke.

From 1st July 2007, the Health Act 2006 became law in England. Under the terms of its five regulations, smoking is forbidden in most enclosed or substantially enclosed public places, including workplaces. The word “enclosed” refers to premises that have a ceiling or roof and are wholly enclosed on a permanent or temporary basis (except for doors, windows or passageways). “Substantially enclosed” refers to premises that have a ceiling or roof but also an opening in the walls that is less than half the total area of the walls. The area of the opening does not include doors, windows, or any other fitting that can be open or shut. The non-smoking legislation applies equally to both employees and visitors to the premises. Anyone who breaches the law could face heavy financial penalties – and any Venables Associates employee who does so will first be reminded of their legal obligations. If the employee refuses to comply, this matter will be escalated in accordance with Venables Associates’s disciplinary procedure.

It should be noted that this legislation also applies to vehicles if they are used in the course of paid work by more than one person – regardless of whether they are in the vehicle at the same time. Smoking will therefore not be permitted in any vehicle belonging to Venables Associates. Vehicles that are used primarily for private purposes will not be required to be smoke free, however.

Information on giving up smoking can be obtained from the NHS Smoking Helpline on: 0800 169 0 169. Further details can be found at various sites on the internet, including: www.gosmokefree.co.uk.



Applicable regulations include:

Health and Safety at Work Act 1974
The Health Act 2006

Horseplay

Horseplay causes accidents, and sometimes fatalities, on site. At no time can horseplay by employees of Venables Associates Controls be condoned: such behaviour may result in disciplinary action in accordance with Venables Associates' procedures.



Applicable regulations include:

Health and Safety at Work Act 1974

Display screen equipment

Many of the guidelines discussed in this document, such as keeping a tidy site, manual handling and safe use of electrical equipment, apply equally to office-based staff performing tasks such as purchasing and administration.

Probably the most hazardous activity carried out in offices is using display screen equipment or a computer. Users need to be aware that it can cause particular musculo-skeletal problems through poor posture and poorly adjusted workstations, for example, carpal tunnel syndrome, repetitive strain injury. Computer equipment must only be used with proper office furniture and equipment to ensure that the desk and chair arrangement can be adjusted to avoid posture related problems. As when you use a vehicle belonging to someone else, if you work at someone else's workstation, this needs to be adjusted so that the seat and controls are comfortable for you to use.

The Health and Safety (Display Screen Equipment) 1992 Regulations set out the legal responsibilities for the employer and employee in detail. Venables Associates policy is

in line with this and good practice, in order to eliminate risk of work related upper limb disorders and associated issues:

- The operator should adjust the chair and VDU to find the most comfortable working position - forearms should be approximately horizontal and eyes at the same height as the top of the screen.
- Make sure there is enough space to accommodate any necessary documents or equipment.
- A document holder may help to avoid awkward neck and eye movements: try different ways of positioning the keyboard, mouse, screen and documents to find the most comfortable way of working. Avoid placing the equipment so that you have to stretch your fingers or reach round obstructions.
- The desk and VDU should be arranged to avoid glare or bright reflections on the screen. Neither the operator or the screen should directly face windows or bright light. Curtains or blinds should be adjusted to prevent unwanted light.
- There should be space under the desk to move legs freely; obstacles such as boxes or equipment should be moved.
- Excess pressure from the edge of the seat on the backs of legs and knees should be avoided - smaller users may find a footrest beneficial (or rest the feet on a big book or box file if a footrest is unavailable).
- Don't batter the keyboard! Soft keystrokes and straight wrists should help to avoid risk of injury when keying, and likewise, the mouse should be held lightly; mouse buttons should not be pressed hard.
- Empty space should be allowed in front of the keyboard to rest while not keying.
- Keep the screen clean, and chose settings which enable you to read the text easily. Brightness/contrast should be adjusted appropriately to suit the lighting conditions.
- If the characters on the screen are not in sharp focus, flicker or move, the screen may need servicing or adjustment.
- The operator should aim to take frequent short breaks from keying. These often occur naturally for activities such as filing.

Report any concerns relating to the computer equipment or workstation(s) to the Safety Officer. A template for Display Screen Equipment Risk Assessment will be

found in the Risk Assessments section of this document (Appendix 1). A responsible person should use this to carry out a Display Screen Equipment Risk Assessment for each member of staff who is a computer user at least every six months. Issues identified should be recorded and addressed as soon as practically possible.



Applicable regulations include:

Health and Safety at Work Act 1974

The Health and Safety (Display Screen Equipment) Regulations 1992 (as amended in 2002)



Further information can be found in the following leaflets:

Working with VDUs

Officewise

Stress

Venables Associates recognises that stress is a health and safety issue and that stress can be detrimental to health, and can result in:

- Physical effects such as heart disease, back pain, gastrointestinal disturbances and various minor ailments
- Psychological effects including anxiety and depression.

Stress can also lead to harmful behaviour such as drinking too much caffeine, alcohol or smoking. Ultimately, time lost at work through stress can have a negative impact on productivity. Tackling the causes of stress before ill health occurs can help to prevent this situation and is in everyone's interest.

The term "stress" is distinct from pressure, which can be a positive state if managed correctly. The Health and Safety Executive defines stress as "the adverse reaction people have to excessive pressure or other types of demands placed on them", and has identified six key areas or "risk factors" which can be causes of work-related stress. These are:

1. The demands of the job – the Company strives to make reasonable demands of its employees and ensure that their skills/abilities match the requirements of the job, but staff should feel able to indicate if they are having problems coping with their workload, work patterns or working environment.
2. The employee's control over his/her work – employees should feel that they have a say about how they do their work and that any concerns they raise will be listened to and met with an appropriate response. Also, the use of skills and initiative are to be encouraged. Where practical, professional development will be fostered.
3. The support received from colleagues or management – in particular, an employee should consult their line manager sooner rather than later if he/she feels that stress is becoming a problem. If the stress is work-related, it may be possible to effect changes to improve matters or prevent the situation from getting worse. Even if the stress is due to external factors, it may be possible to do something to reduce the employee's pressure.
4. Relationships at work: the Company strives to create a positive and fair culture. Venables Associates has its own disciplinary code and bullying and other kinds of unacceptable behaviour will not be tolerated.
5. The individual's role: each individual should understand his role within the Company and what is expected of him/her, and also that his/her concerns regarding this will be listened to and acted upon. If the employee feels that anything is unclear or conflicting, he/she should speak to the Safety Officer.
6. Change – this can be a great cause of stress. Where possible, employees will be involved in and informed about changes affecting the business, and a clear timetable of events will be laid down. If appropriate, training will be provided to prepare employees for changes to their work.

Many people find discussing stress difficult, but communication is vital to overcome it; anyone who feels that stress at work is becoming an issue, should approach the Safety Officer in the knowledge that his/her concerns will be addressed in confidence.



Applicable regulations include:

Health and Safety at Work Act 1974

5 HEALTH AND SAFETY INFORMATION

Health and safety information on the following topics is contained in a separate folder:

Section	Topic	Leaflet
1	Health and safety law	Health and safety law Health and safety regulation
2	Managing health and safety	RIDDOR explained: Reporting of accidents, injuries, work-related ill health, deaths and dangerous occurrences regulations Simple guide to the Provision and Use of Work Equipment Regulations 1998 A short guide to the Personal Protective Equipment at Work Regulations 1992
3	Risk Assessment	Five steps to risk assessment
4	Specific areas of risk	The Work at Height Regulations 2005 Safe use of ladders and stepladders Electrical safety and you Electrical safety in construction Noise at work: Guidance for employers on the Control of Noise at Work Regulations 2005 Asbestos dust kills: keep your mask on Getting to grips with manual handling Legionnaires' disease: A guide for employers
5	COSHH	Read the label: How to find out if chemicals are dangerous
6	First aid	Basic advice on first aid at work First aid at work: your questions answered
7	The office environment	Understanding ergonomics at work Working with VDUs How to tackle work-related stress
8	Driving	Driving at work: Managing work-related road safety Act on CO2: Driving your car

This page has been left blank deliberately.

APPENDIX 1: RISK ASSESSMENTS AND METHOD STATEMENTS

Regulation 3 of The Management of Health and Safety at Work Regulations 1999 states that the employer must carry out a risk assessment for every work activity undertaken by a company. A risk assessment, as its name implies, looks at the steps involved in a particular task, the hazards associated with it and how these hazards will be controlled. The employer then has to ensure that the control measures identified in the risk assessment are in place before the work can commence. The method statement sets out in a clear, step-by-step way how the task will be done.

All the Company's written procedures for carrying out work should be adhered to. Mistakes and accidents often happen as a result of "Human factors", in other words, when people:

- Encounter a new situation
- Deviate from usual practice.
- Are in a hurry.
- Feel tired or otherwise under par.

Remember, too, that accidents often happen when people have the best of intentions! Accidents are rarely the result of a single failing – more usually they come about because of a number of causes which have a domino-effect.

Generic risk assessments are acceptable for many tasks that are performed on a regular basis. Before commencing work, the site should be surveyed and any new or unanticipated hazards should be recorded in the "Site comments" box (by hand if necessary), together with details of the control measures to be used. If in doubt, ask your site supervisor for advice; if necessary (e.g. if you think you have found asbestos) an amended risk assessment and method statement will be provided before work resumes. Remember that a risk assessment and method statement should always be appropriate to the level of risk involved in a job – paperwork never saved anyone!

If you need to prepare a risk assessment and method statement, there are a number of handy hints to help you. It's important to remember that a **hazard** is something with the potential to cause harm, e.g. joining adhesive. **Risk** is the probability that

someone will be harmed: in this instance, high if the user fails to follow the appropriate control measures, e.g. use in a well ventilated area, store in an appropriate, labelled container, not mix with other products, etc. It's also useful to remember **SREDIM**:

- S** Select the task
- R** Record all the steps in the task
- E** Examine the hazards involved
- D** Develop control measures
- I** Implement measures
- M** Maintain or monitor (or review)

Another handy guide to remember is the health and safety hierarchy - otherwise known as **ERIC PD** - when planning work. Always start from the top of the list of control measures and work down:

- E** Eliminate – can I do this job a different way to eliminate risk, e.g. use a long-handled tool rather than going up a ladder?
 - R** Reduce – can I use a less hazardous method, e.g. a different type of flux product?
 - I** Isolate – can I use a barrier or other physical means to keep people out of danger?
 - C** Control – e.g. limit exposure to vibrating equipment (because of the risk of hand arm vibration syndrome) or provide training.
-
- P** Personal Protective Equipment – needs to be combined with and in line with best working practices; not a substitute for a safe system of work!
 - D** Discipline – horseplay and inattention leads to accidents!

Items above the line will make the workplace safer: items below the line affect the safety of individual members of staff.

When risk assessments are being carried out for project works, the COSHH Data Sheets for the products that are going to be used must be attached to the risk assessment (see separate folder for sample COSHH assessments and a blank COSHH assessment and COSHH Material Safety Data Sheets). The risk assessments must make reference to the products being used and the precautions and first aid procedures must be communicated to all people coming into contact with the product, in case of an accident.

Specimen risk assessments and method statements have been prepared and will be found in this section for the following tasks:

1. Site survey – commercial premises
2. Visiting a construction site
3. Working in a plant room
4. Office work
5. Working in an old control panel
6. Working in an existing control panel.

A record sheet (blank copies will be found in the Health and Safety Records folder) should be completed, to show that the relevant staff have read it and agree to work in accordance with it. This should be retained on file by Venables Associates, in case it is needed as evidence in the event of an accident investigation.

There are many different types of risk assessment

- COSHH assessment
- Display screen equipment assessment
- Biological risk assessment
- Noise risk assessment
- Manual handling assessment

but the underlying principles are the same.

Sample COSHH assessments for the following substances, which may be encountered by employees of Venables Associates on site, will be found in this section:

- Helix anti-static general purpose fluid
- Sulphur hexafluoride gas
- Transformer oil
- Yuasa battery acid electrolyte.

There is also a blank COSHH assessment template, for use in the preparation of additional assessments as required. This can be completed by hand if necessary.

Designer's risk assessments have a different emphasis. They must be project specific, commensurate with the level of risk involved, and avoid detailing measures for the control of generic risks, e.g. work at height, which a competent contractor will be aware of. The aim is to concentrate on significant risks that cannot be eliminated from the design after due consideration of alternative solutions, that may not be obvious to those who use the design. An example of this could be the need to site solar tub collectors appropriately on a roof to ensure that the structure of the roof is not damaged by wind, and to ensure that the design of the roof is capable of withstanding the load placed upon it. See Appendix 3: Co-operation and Co-ordination, for further information.

Venables Associates has an "Open Door" policy on health and safety matters: always tell the Safety Officer if you have any concerns about health and safety or staff welfare.



Applicable regulations include:

Health and Safety at Work Act 1974
Management of Health and Safety at Work Regulations 1999
Construction (Design and Management) Regulations 2007



Further information can be found in the following leaflets and HSE publication:

Five steps to risk assessment
The High Five: Five ways to reduce risk on site
Managing Health and Safety in Construction

APPENDIX 2: SELECTION OF SUBCONTRACTORS

The term "Contractor" refers to anyone brought in by a client to work at the client's premises who is not an employee of that client.

The term "Sub-contractor" is used to denote anyone brought in by a contractor to work on the contractor's behalf. It is essential that all sub-contractors employed by Venables Associates:

- Are competent to do the job safely without risks to health and safety.
- Will work in accordance with the health and safety systems and practices of our clients, e.g. permits to work.
- Understand and will work in accordance with our Health and Safety policy and any risk assessments/method statements provided by Venables Associates Ltd
- Will co-operate when asked by Venables Associates or our clients to provide the required documentation, including proof of training or other evidence of their adherence to safe systems of work and industry best practice.
- Will co-operate when health and safety spot-checks are carried out by Venables Associates or our clients (or their safety representatives).
- Stop work, if required to do so, where there are health and safety deficiencies, until such time as a safe system of work or control measures have been agreed.

Good communication is a vital part of this process; Venables Associates undertakes to share relevant health and safety information with its sub-contractors, including details of any risks that other parties could not be reasonably expected to know about. This information exchange is particularly important when more than one sub-contractor is involved or when there are to be variations to the agreed schedule of work. Work will be reviewed after completion to see whether performance can be improved in future.

A short form for the assessment of (potential) sub-contractors, Contractor Selection Record follows which will be used if in future it is necessary to engage the services of

other companies. This has been drawn up in accordance with the Approved Code of Practice for the Construction (Design and Management) Regulations 2007. The Safety Officer is responsible for ensuring that before any subcontractor is appointed, this document has been completed satisfactorily.

All subcontractors will be provided with a copy of the Venables Associates Limited Health and Safety Policy.



Applicable regulations include:

Health and Safety at Work Act 1974

Management of Health and Safety at Work Regulations 1999

Construction (Design and Management) Regulations 2007



Further information can be found in the following HSE publication:

Managing Health and Safety in Construction

APPENDIX 3: CO-ORDINATION AND COOPERATION

Clients, contractors and subcontractors have a duty to protect each other their workforce and other people (e.g. visitors, people living in close proximity and members of the public). If construction projects are not co-ordinated properly, the results can be costly for all parties. As well as the human cost, failure to co-ordinate adequately before, during and after work can result in delays to the work and claims for damages. Only by co-ordinating fully and properly can health and safety be effectively managed. Although not all projects are notifiable, the Construction (Design and Management) Regulations 2007 assign specific duties to all parties involved in the construction process, who can be described as parts of a communication web:

The client

Venables Associates will participate actively in planning the health and safety arrangements of any project in conjunction with the client and any other contractor employed by the client. Venables Associates and its staff will work in accordance with the client's own health and safety policy.

Principal contractor

If a project is notifiable, ultimate responsibility for co-ordinating the activities of contractors on site rests with the principal contractor, but other contractors have a duty to take part in the information and communication process to ensure optimum site safety. Venables Associates will therefore:

- Co-operate fully with the principal contractor at all times and will provide any health and safety information required, including information about risks to other individuals arising from its work.
- Supply as required information for incorporation in documentation such as the pre-tender health and safety plan, construction phase health and safety plan and health and safety file.
- Venables Associates will comply with any reasonable directions from the principal contractor and with any relevant rules in the health and safety plan. If shortcomings in the plan are identified, the principal contractor must be informed immediately so that changes can be made.

Designers

Designers have special responsibilities under the Construction (Design and Management) Regulations 2007 and these are set out clearly in the Approved Code of Practice. The role of the designer involves close co-ordination and co-operation with the other members of the project team. Under the heading **What designers should do for all projects**, the Approved Code of Practice lists a number of items including the following:

“When carrying out design work, avoid foreseeable risks to those involved in the construction and future use of the structure, and in doing so, they should eliminate hazards (so far as is reasonably practicable, taking account of other design considerations) and reduce risk associated with those hazards which remain... provide adequate information about any significant risks associated with the design... co-ordinate their work with that of others in order to improve the way in which risks are managed and controlled...”

In carrying out those duties, designers need to consider the hazards and risks to those who:

Carry out construction work including demolition;

Clean any window or transparent or translucent wall, ceiling or roof in or on a structure or maintain the permanent fixtures and fittings...

Use a structure designed as a place of work;

May be affected by such work, for example, customers or the general public” ...

(Paragraph 119).

Of course on some projects, design work may be ongoing whilst construction is in progress and the designer’s risk assessments will need to be re-visited throughout the process. Nonetheless, it is important that the health and safety considerations are integral to the project at all stages. Paragraph 134 of the ACoP recognises that, *“It is not always possible to provide all the information at the same time, particularly when design work is continuing whilst construction work is underway. In these circumstances information should be released as the design develops, but construction work should not be allowed to proceed unless all the information necessary for the work to be carried out safely has been provided.”*

Use of sub-contractors

- Venables Associates will select only suitably qualified and competent sub-contractors.
- New sub-contractors will be assessed using the sub-contractor selection questionnaire.
- Venables Associates will communicate clearly to any sub-contractor it appoints:
 - All aspects of the work that is required, including work in the preparatory and completion phases. This will involve considering all the health and safety risks.
 - The safety standards and practices that are expected, through its health and safety policy, risk assessments, method statements, and other relevant documentation. Venables Associates will ensure that any necessary Personal Protective Equipment is worn by its sub-contractors.
 - Whilst work is in process, Venables Associates will monitor the sub-contractor and ensure work is being carried out in accordance with the safety plan. If work is not compliant, Venables Associates will liaise with the sub-contractor to rectify the situation immediately.

Other measures

- In addition, Venables Associates undertakes to comply with permits to work and other health and safety procedures set out by the client/principal contractor.
- Venables Associates undertakes to keep a clear record of any accident involving individuals working on its behalf and to keep all relevant records and plans safely.
 - Under the terms of RIDDOR (Reporting of Injuries, Diseases and Dangerous Occurrences Regulations) 2012, Venables Associates will inform the client/the Principal Contractor of any dangerous occurrence, death or near miss.
- Venables Associates will co-operate fully with any routine safety checks carried out on site by the client/principal contractor, and where necessary, will share the results of lessons learnt as part of the communication process with other contractors on site. If necessary Venables Associates will also make

changes to its health and safety processes. If the client's/principal contractor's requirements cannot be met immediately, Venables Associates will stop work until such time as the requirements can be met.

The exchange of information is particularly vital when changes to the scheduled work are being made or when the client/principal contractor is in a position to know more about the inherent risks in a situation than the contractor: Venables Associates will provide information promptly, clearly and will co-operate fully in the liaison process.



Applicable regulations include:

Health and Safety at Work Act 1974

Management of Health and Safety at Work Regulations 1999

Construction (Design and Management) Regulations 2007



Further information can be found in the following HSE publication:

Managing Health and Safety in Construction

APPENDIX 4: SAFETY INSPECTIONS

The Safety Officer is responsible for carrying out inspections on site and in our office premises. The findings of the inspection will be shared with the workforce as necessary.

Inspections by others

Everyone who works for Venables Associates should be aware that the Company's activities may also be subject to third party scrutiny; these individuals may report unsafe practices or ask to have a worker removed from site if they see an infringement of any sort, including someone acting in breach of the diversity policy, etc.).

Health and Safety Inspectors

Be aware also that inspectors employed by the Health and Safety Executive have the power to visit workplaces, including offices and work sites, at any time, and are able to take a number of sanctions if work is not being carried out in a safe manner. This includes the serving of a notice, including:

- **A prohibition notice** - this tells a duty holder to stop an activity immediately; in practice this can mean closing down the work site until improvements are in place.
- **An improvement notice** – this specifies remedial action and gives the duty holder a date by which this must be completed.

An inspector's visit can also result in prosecution.



Applicable regulations include:

Health and Safety at Work Act 1974

Management of Health and Safety at Work Regulations 1999

The Reporting of Injuries, Diseases, and Dangerous Occurrences
Regulations 1995

Construction (Design and Management) Regulations 2007



**Further information can be found in the following leaflet and HSE
publication:**

RIDDOR Explained

Managing Health and Safety in Construction

APPENDIX 5: LOSS INCIDENT INVESTIGATION

In the event of an accident, the Managing Director and Safety Officer will conduct an accident investigation as soon as practically possible. An accident investigation form has been designed for this purpose and a copy follows.

It is vital that if such an investigation is carried out, everyone involved co-operates, and shares any relevant information they have. It is also important to stick only to the known facts, and not to get involved in conjecture, hearsay or speculation: the process is about preventing something similar in the future, not apportioning blame.

Once the investigation has been concluded, the Managing Director will communicate the findings and details of any corrective action required to all interested parties, including members of the Venables Associates team, the client and so on. Details of the investigation must be kept securely by the Managing Director with the Company's health and safety records.

In the case of a more serious incident, in which a person is killed or injured or property is damaged, or a near miss which clearly could have resulted in such an incident, the Safety Officer will make a report under the terms of RIDDOR, as previously. The management and staff of Venables Associates will co-operate fully with any third party accident investigation.



Applicable regulations include:

Health and Safety at Work Act 1974

Management of Health and Safety at Work Regulations 1999

The Reporting of Injuries, Diseases, and Dangerous Occurrences

Regulations 2012



Further information can be found in the following HSE publication:

RIDDOR Explained

This page has been left blank deliberately.